




# CROWN™

## Technical Data Sheet

# EcoDRY™

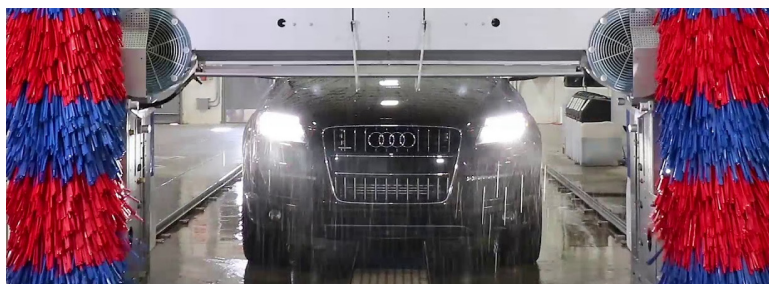

## High-Performance Automotive Spray Wax and Drying Agent for Friction and Touchless Car Washes

Versatile spray wax and drying agent for all types of car washes. Provides excellent beading and assures faster breaking of water off of car surface and better drying from blowers. Helps protect vehicle undercarriage from salt and road grime. Effective for both friction and touchless operations. Highly dilutable and economical to use.

### Directions for Use

The amount of this product to use will depend on several variables, including conveyor speed, temperature, drip area, etc. For optimum drying and waxing performance with minimum product waste, adjust proportioner as recommended by equipment manufacturer, or adjust metering device to give maximum results. Apply full strength at the rate of 192:1 - 250:1 (approximately 1/2 to 2/3 oz. per vehicle). This product may also be prediluted at 20-25:1 in cold water (red or blue Hydrominder tip). For manual drum mixing, add 1-3 gallons into a clean plastic drum, then fill to 55 gallons while stirring. Apply diluted solution at the rate of 2-3 ounces per vehicle. Cold weather may require higher usage amounts.

### Safety Reminder

Consult product label and Safety Data Sheet (SDS) before use. SDS's may be downloaded from [www.crown-chem.com](http://www.crown-chem.com).

### Technical Specifications

Appearance	Red Liquid
Odor	Characteristic
pH (1% solution, 22°C)	<9.0
Foaming	None
Flash Point	>200°F
Bulk Density (lbs/gal, 22°C)	8.16±0.1
Stability Range	40-100°F
Free Alkalinity (as Na <sub>2</sub> O)	None
Solubility (in H <sub>2</sub> O, 22°C)	100%
Phosphate Content	None

### Product Number

84905  
84915  
84930  
84955

### Packaging

5 gal. pail  
15 gal. drum  
30 gal. drum  
55 gal. drum

**CROWN™** 4701 W. 136th St. • Crestwood, IL 60418  
tel (708) 371-6990 • (800) 672-4065  
fax (708) 371-6992  
[www.crown-chem.com](http://www.crown-chem.com)  
**CROWN CHEMICAL, INC.**

